

DATA SHEET

GREENFLOW 75


High Performance, Low Profile Resin Distribution Medium

Description

Greenflow 75 is designed to efficiently distribute resin with little waste due to the low profile, tight construction. **Greenflow 75** can be used with polyester vinyl ester and epoxy resins.

Material Characteristics

Color	Green
Thickness	.035" ± .003" (.89mm ± 75µm)
Melt Point (Method:DSC)	320°F (161°C)
Configuration of Net	Rhombic
<u>Roll Size</u>	41" x 350' (104cm x 106.6m)

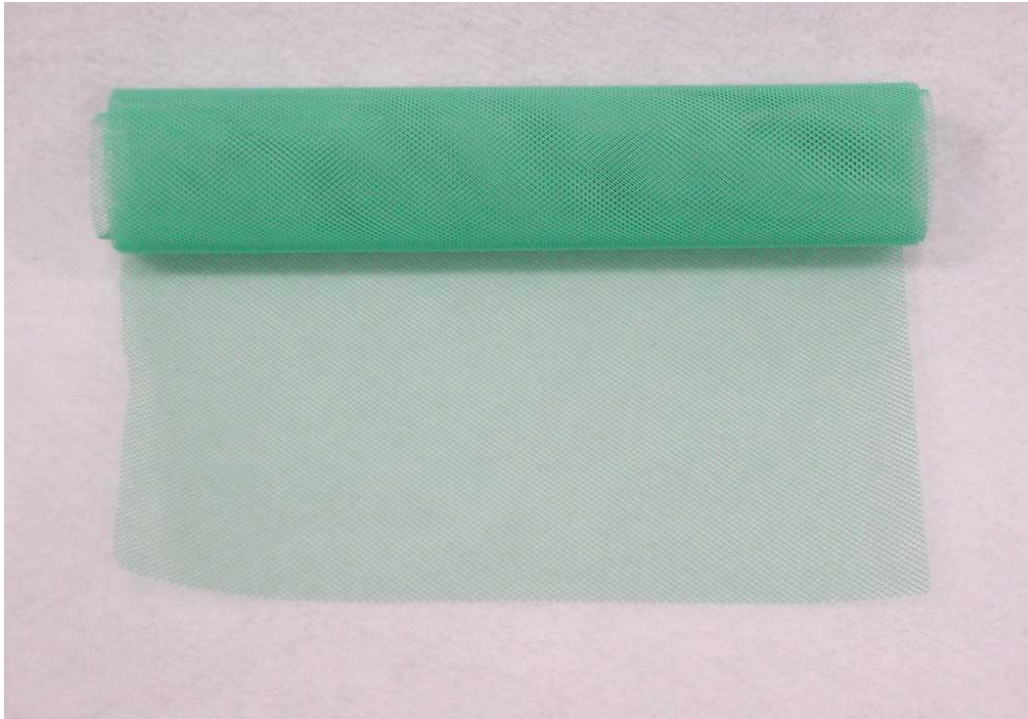

CATALOG POSITION: RESIN INFUSION PRODUCTS

As the conditions or methods of use, including storage, are beyond our control, Airtech International, Inc. does not assume any responsibility for the performance of this material for any particular use. The material is sold "as is". Airtech International, Inc. disclaims, and buyer waives, any and all implied warranties, including without limitation the implied warranties of merchantability and of fitness for particular use. The information contained herein represents typical properties and should not be used for specification purposes.

MORE THAN A MANUFACTURER...A TECHNICAL PARTNER!

